




TOP

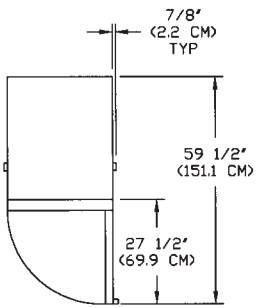


NSCR211

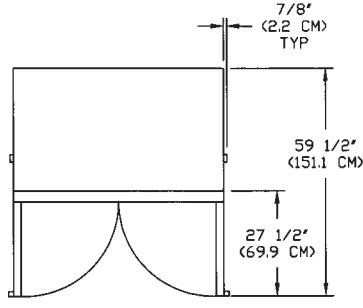


NSCR482

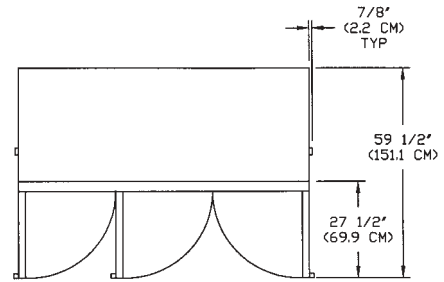


NSCR763

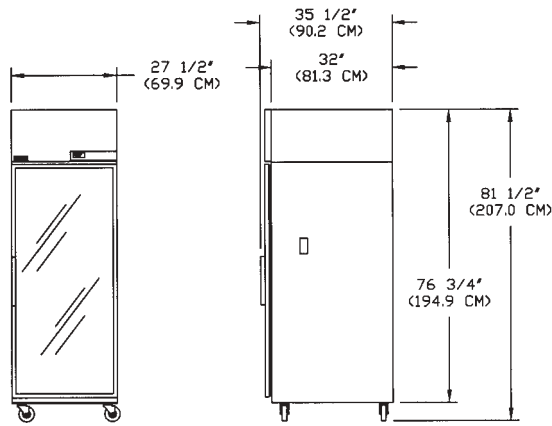

NSCR211

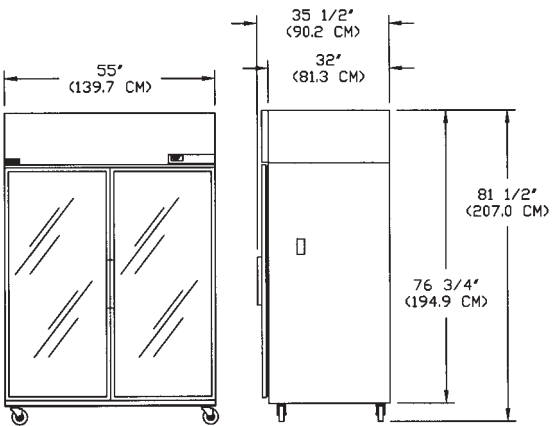

NSCR482

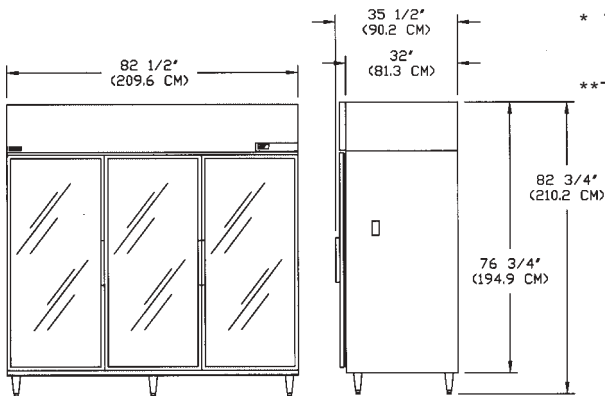

NSCR763

FRONT

SIDE

SPECIFICATIONS

	NSCR211	NSCR482	NSCR763
Crated Height (in) (cm)	81" (205.7 cm)	81" (205.7 cm)	81" (205.7 cm)
Crated Width (in) (cm)	31" (78.7 cm)	59" (149.9 cm)	86" (218.4 cm)
Crated Depth (in) (cm)	38" (96.5 cm)	38" (96.5 cm)	38" (96.5 cm)
Crated Weight (lbs) (kg)	365 (165.5 kg)	545 (247.2 kg)	750 (340.1 kg)
Interior Height (in) (cm)	59" (149.9 cm)	59" (149.9 cm)	59" (149.9 cm)
Interior Width (in) (cm)	23-1/2" (59.7 cm)	51" (129.5 cm)	78-1/2" (199.4 cm)
Interior Depth (in) (cm)	28" (71.1 cm)	28" (71.1 cm)	28" (71.1 cm)
Overall Height* (in) (cm)	81-1/2" (207.0 cm)	81-1/2" (207.0 cm)	82-3/4" (210.2 cm)
Overall Width (in) (cm)	27-1/2" (69.9 cm)	55" (139.7 cm)	82-1/2" (209.6 cm)
Overall Depth (in) (cm)	35-1/2" (90.2 cm)	35-1/2" (90.2 cm)	35-1/2" (90.2 cm)
Gross Cubage (ft. ³) (m ³)	22.5 (0.64)	48.8 (1.38)	75.0 (2.12)
Epoxy Coated Shelves	N/A	3	6
Number of Solid Stainless			
Steel Half Shelves	3	3	3
Number of Casters	4	4	6**
Number of Legs	4 (optional)	4 (optional)	6 (standard)
Condensing Unit Size	1/4	1/2	3/4
Refrigerant	R-22	R-22	R-22
Electrical Characteristics	115/60/1	115/60/1	115/208-230/60/1
Cord & Plug Furnished	Yes	Yes	No**
Maximum Fuse Size	15	15	15
NEMA Plug Configuration	5-15P	5-15P	N/A
Total Amp Draw	10	12	12

Specifications subject to change without notice.

* The overall heights shown in the table and drawings are with casters. With 6" legs, the overall height is 82-3/4" (210.2 cm).

**This model is available with a cord connection and casters. Consult the Factory.

SMALL BUSINESS & WOMAN OWNED



Revision Date: 5/00
 NOR-LAKE, INC. 2000
 Printed in the U.S.A.
 Part Number: 077435